




208331 - MM espagnolette central BS 15 1400 with 3 i.S. SRH/SRW 1.001-1.400 silver

Technical drawing

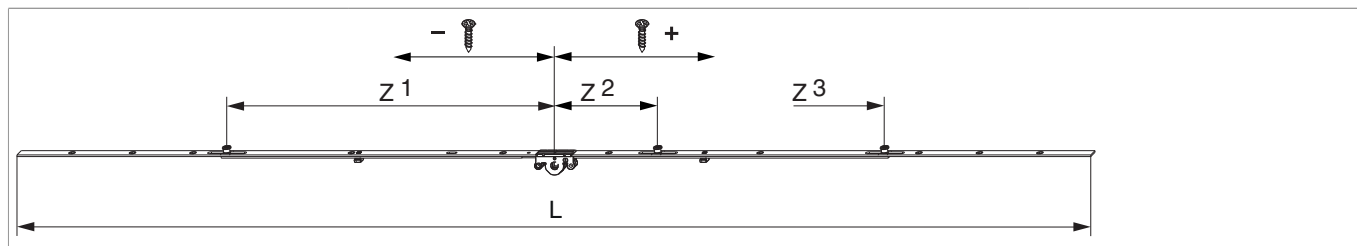

		L				Nº
silver	1.400	1.420	15	1.001 - 1.400	10	208331

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12
208331	10	-640	-560	-480	-270	-70	70	270	480	560	640		

Cam position table

Nº		Z1	Z2	Z3	Z4	
208331	3	-435	135	435		

Jigs

			Nº
Drilling jig for drive gear drill-hole MM	for 3 mm drillbits	1	203861
Drilling jig for drive gear drill-hole MM	for 3 mm and 12 mm drill bit	1	203862



208331 - MM espagnolette central BS 15 1400 with 3 i.S. SRH/SRW 1.001-1.400 silver


Gearbox dimensions




- Routing width 12 mm for drive gear box
- Use SPAX screw with $\varnothing$ 5 mm or M5 screw to fasten the handle.

Drilling hole pattern

For timber windows

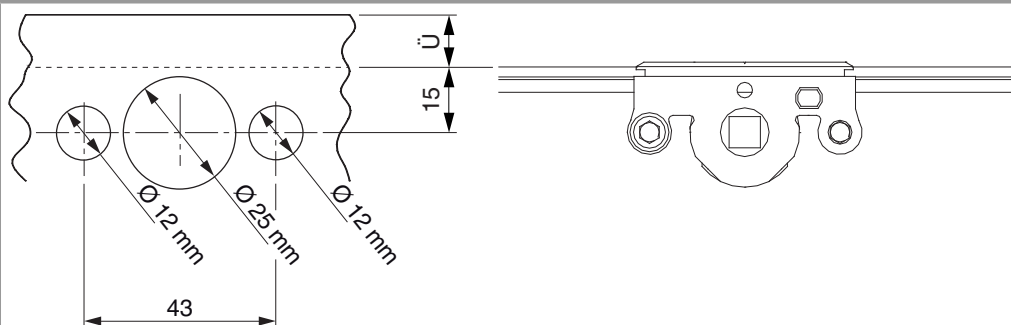

For PVC and aluminium windows

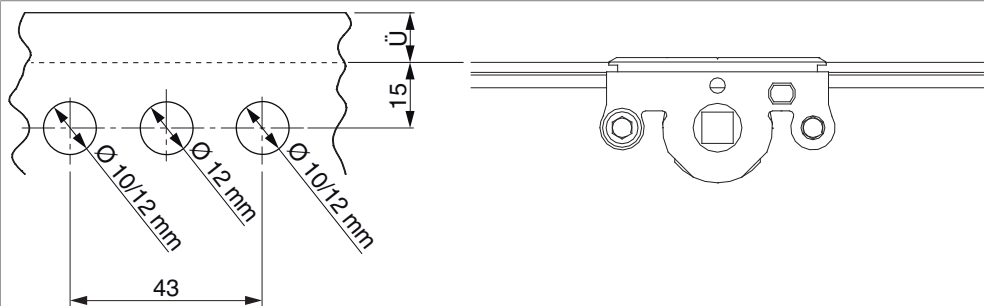

Gasket compression adjustment

i.S. locking cams and standard locking cams

