




208328 - MM espagnolette central BS 15 500 with 2 i.S. SRH/SRW 300-500 silver

Technical drawing

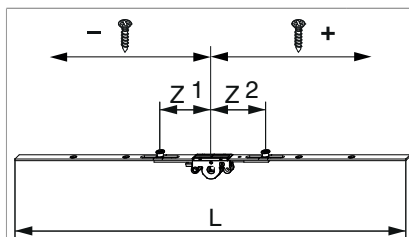

		L				Nº
silver	500	520	15	300 - 500	20	208328

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12
208328	4	-185	-115	115	185								

Cam position table

Nº		Z1	Z2	Z3	Z4	
208328	2	-70	70			

Jigs

			Nº
Drilling jig for drive gear drill-hole MM	for 3 mm drillbits	1	203861
Drilling jig for drive gear drill-hole MM	for 3 mm and 12 mm drill bit	1	203862



208328 - MM espagnolette central BS 15 500 with 2 i.S. SRH/SRW 300-500 silver


Gearbox dimensions




- Routing width 12 mm for drive gear box
- Use SPAX screw with $\varnothing$ 5 mm or M5 screw to fasten the handle.

Drilling hole pattern

For timber windows

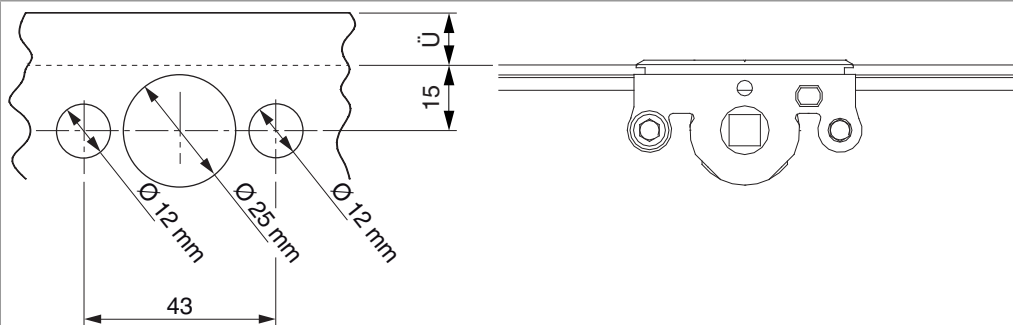

For PVC and aluminium windows

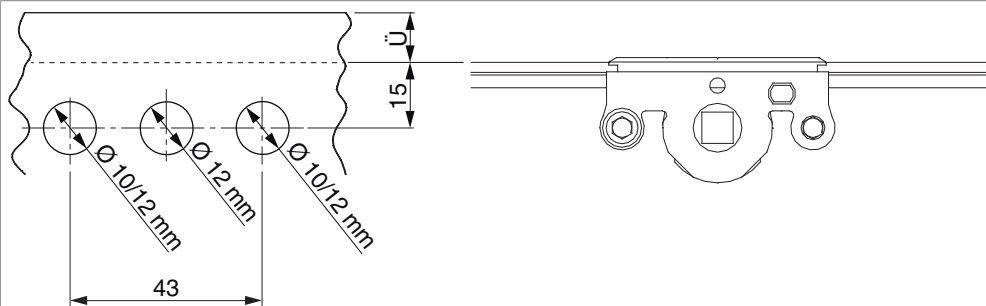

Gasket compression adjustment

i.S. locking cams and standard locking cams

