


208329 - MM espagnolette central BS 15 700 with 2 i.S. SRH/SRW 501-700 silver

Technical drawing

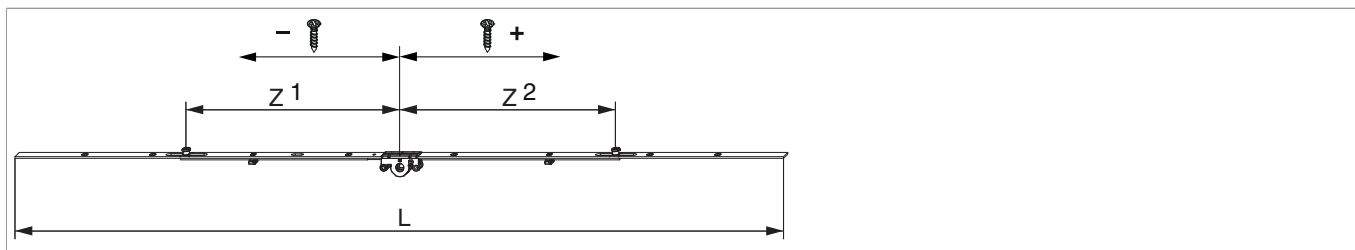

		L				Nº
silver	700	720	15	501 - 700	20	208329

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12
208329	6	-300	-230	-70	70	230	300						

Cam position table

Nº		Z1	Z2	Z3	Z4	
208329	2	-185	185			


Jigs

			Nº
Drilling jig for drive gear drill-hole MM	for 3 mm drillbits	1	203861
Drilling jig for drive gear drill-hole MM	for 3 mm and 12 mm drill bit	1	203862



208329 - MM espagnolette central BS 15 700 with 2 i.S. SRH/SRW 501-700 silver


Gearbox dimensions

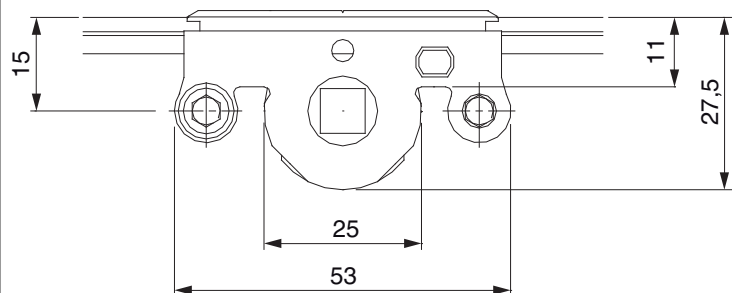


- Routing width 12 mm for drive gear box
- Use SPAX screw with $\varnothing$ 5 mm or M5 screw to fasten the handle.

Drilling hole pattern

For timber windows

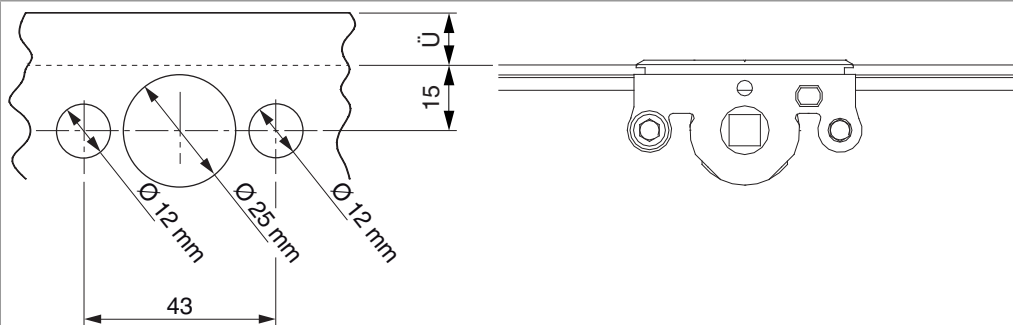

For PVC and aluminium windows

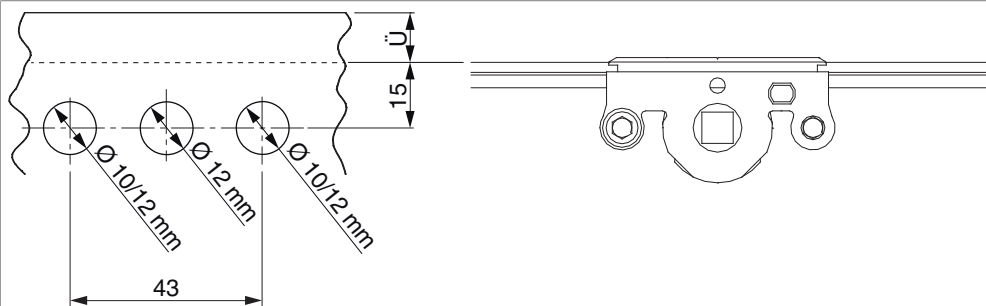

Gasket compression adjustment

i.S. locking cams and standard locking cams

