


208330 - MM espagnolette central BS 15 1000 with 2 i.S. SRH/SRW 701-1.000 silver

Technical drawing

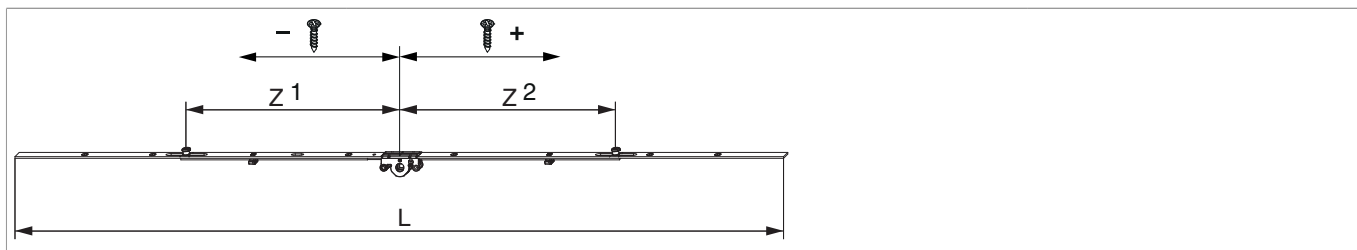

		L				Nº
silver	1.000	1.020	15	701 - 1.000	20	208330

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12
208330	6	-420	-330	-70	70	330	420						

Cam position table

Nº		Z1	Z2	Z3	Z4	
208330	2	-285	285			


Jigs

			Nº
Drilling jig for drive gear drill-hole MM	for 3 mm drillbits	1	203861
Drilling jig for drive gear drill-hole MM	for 3 mm and 12 mm drill bit	1	203862



208330 - MM espagnolette central BS 15 1000 with 2 i.S. SRH/SRW 701-1.000 silver


Gearbox dimensions

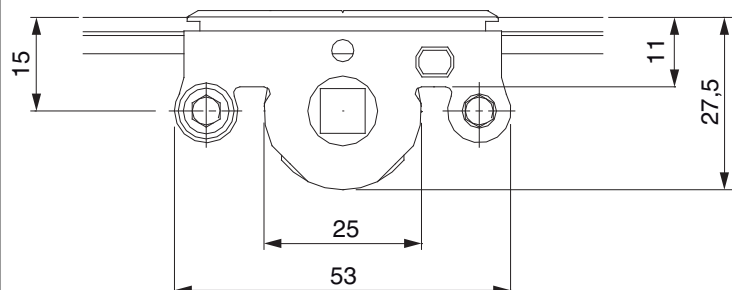


- Routing width 12 mm for drive gear box
- Use SPAX screw with $\varnothing$ 5 mm or M5 screw to fasten the handle.

Drilling hole pattern

For timber windows

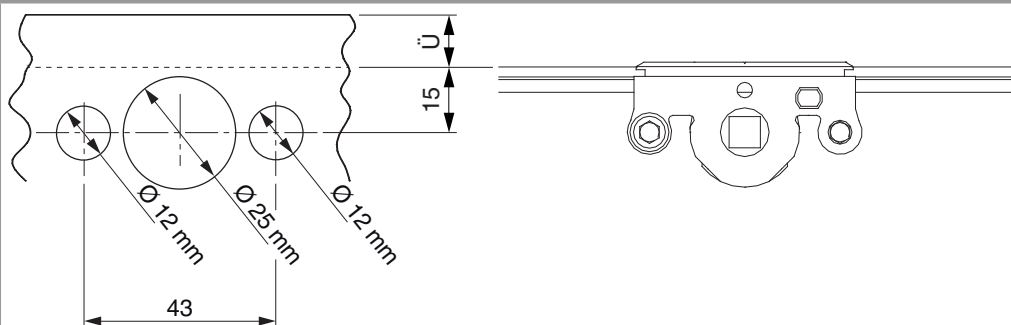

For PVC and aluminium windows

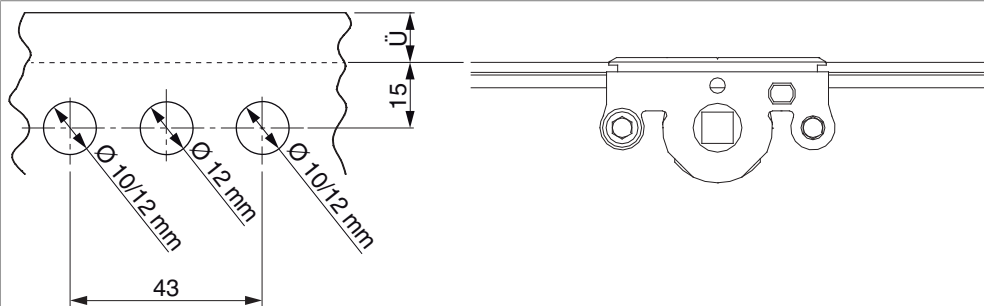

Gasket compression adjustment

i.S. locking cams and standard locking cams

