


208436 - MM espagnolette central BS 15 2400 with 4 i.S. SRH/SRW 1.801-2.400 silver

Technical drawing

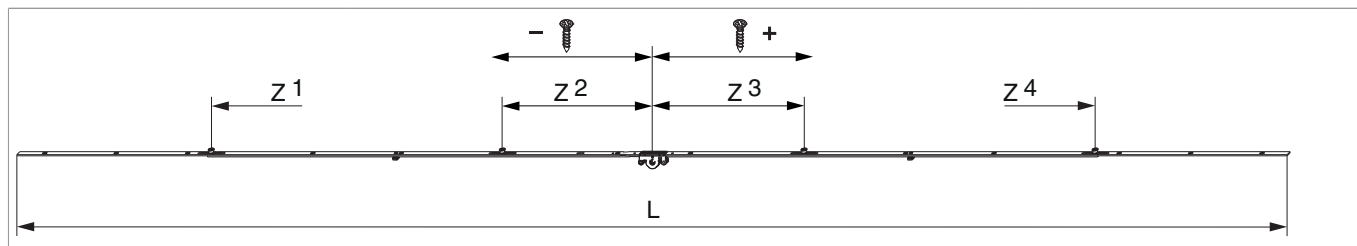

		L				Nº
silver	2.400	2.400	15	1.801 - 2.400	10	208436

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12
208436	12	-1.150	-1.015	-880	-643,5	-476,5	-67,5	70	476,5	643,5	880	1.015	1.150

Cam position table

Nº		Z1	Z2	Z3	Z4	
208436	4	-835	-285	285	835	


Jigs

			Nº
Drilling jig for drive gear drill-hole MM	for 3 mm drillbits	1	203861
Drilling jig for drive gear drill-hole MM	for 3 mm and 12 mm drill bit	1	203862



208436 - MM espagnolette central BS 15 2400 with 4 i.S. SRH/SRW 1.801-2.400 silver


Gearbox dimensions

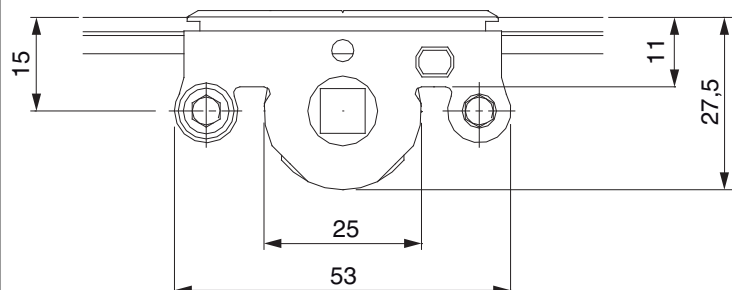


- Routing width 12 mm for drive gear box
- Use SPAX screw with $\varnothing$ 5 mm or M5 screw to fasten the handle.

Drilling hole pattern

For timber windows

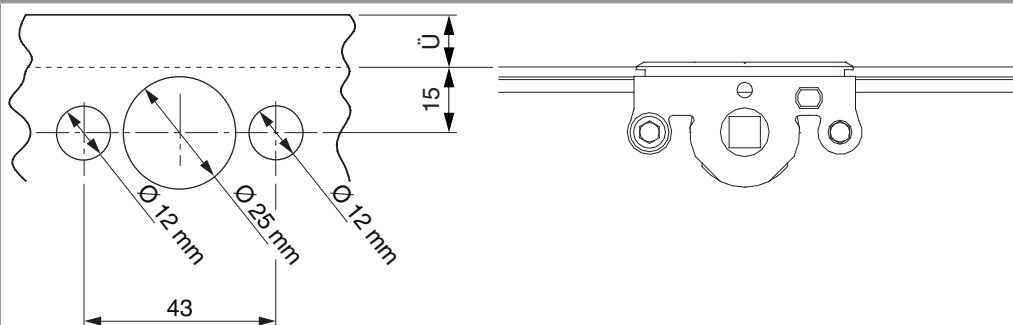

For PVC and aluminium windows

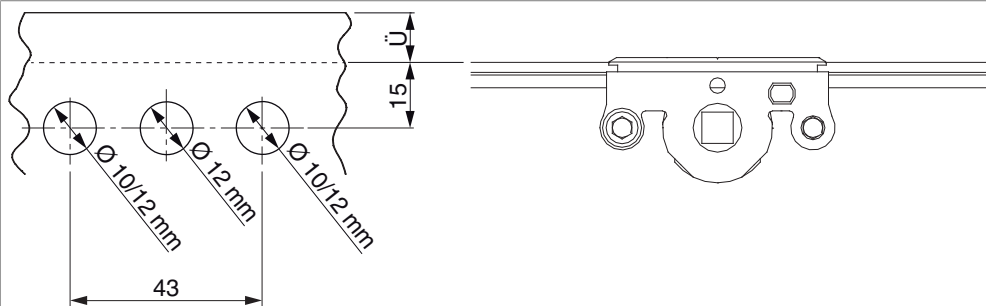

Gasket compression adjustment

i.S. locking cams and standard locking cams

