


370922 - sash lifter and mishandling device retrofittable MM for comfort adjuster silver


Technical drawing



			No
silver	sash lifter and mishandling device retrofittable MM for comfort adjuster	10	370922


Replacing the sash lifter

Disassembly

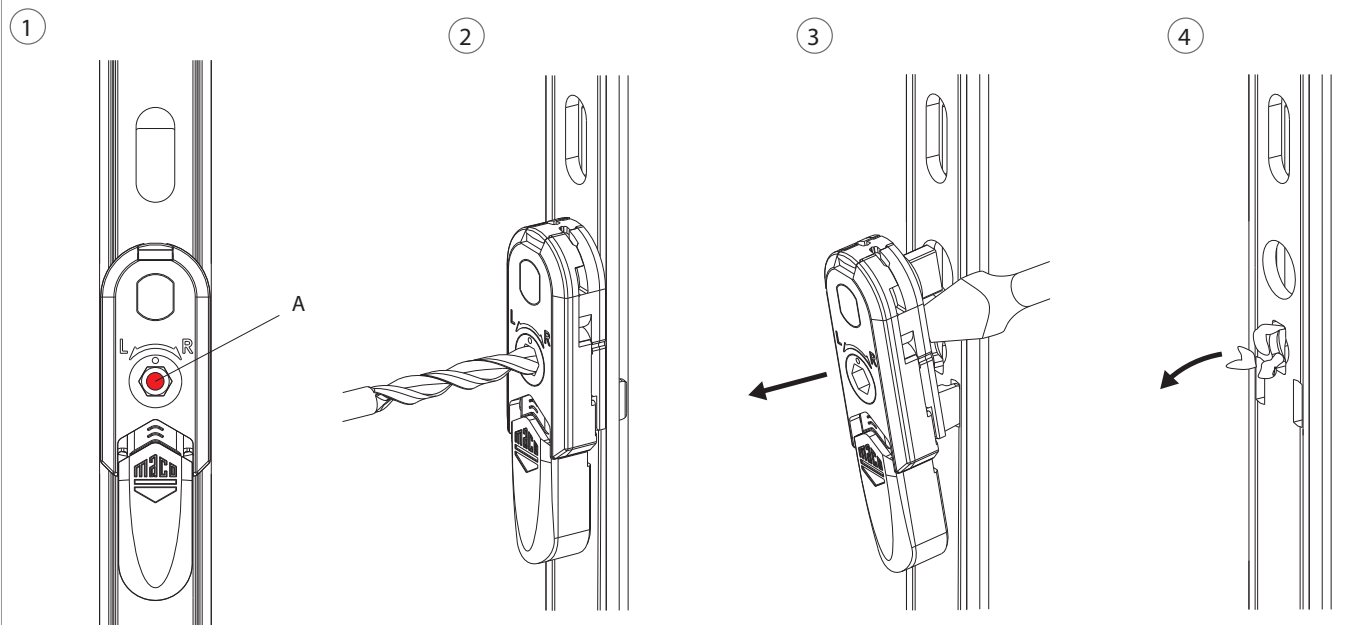


1. Drive gear with sash lifter and centre-punched drilling position (A)
2. Drilling: use Ø 4 mm drill to drill out sash lifter in neutral position
3. Removal: remove sash lifter with screwdriver
4. Cleaning: remove drilling chips completely

Installation

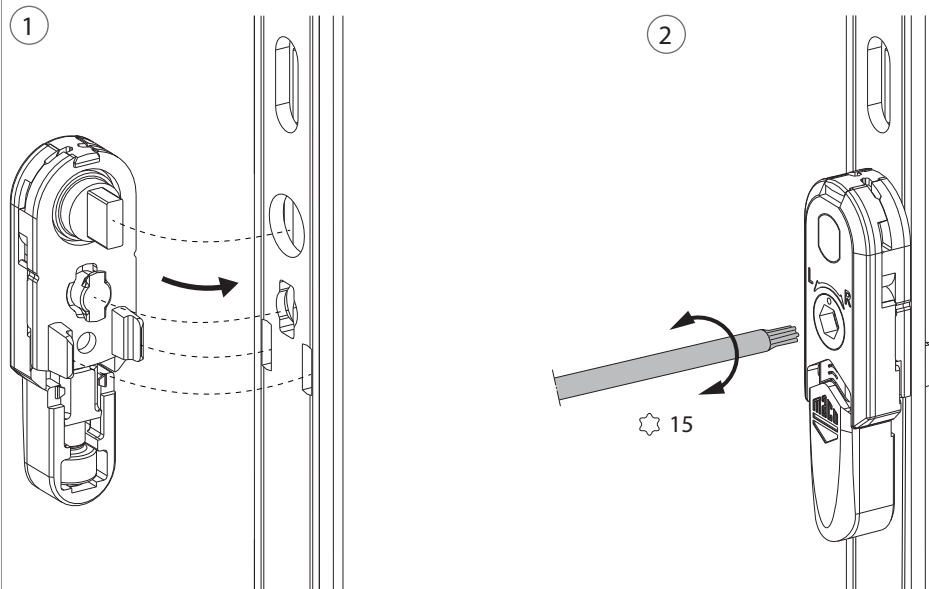

1. Place sash lifter in faceplate recess
2. To arrest turn bayonett lock 90° with TX 15

Activation and adjustment of sash lifter

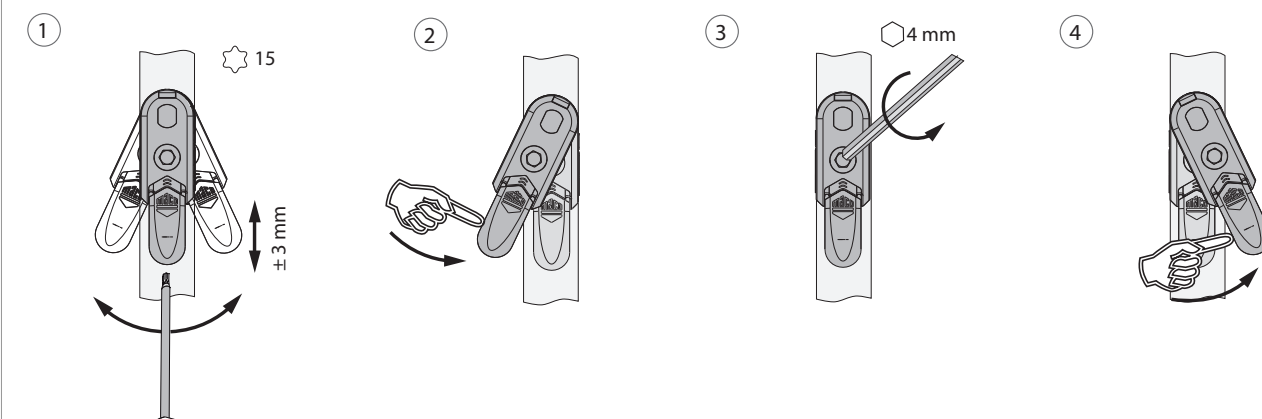

1. Activation and height adjustment of sash lifter
2. Re-setting the sash lifter.
3. Setting neutral position of sash lifter.
4. Activating the sash lifter.