




359640 - punched connecting rod HS 16.4x4 L=1.196 FB 1.225-1.800 silver

Technical drawing



		L			No
connecting rod HS 16,4x4 punched	1.225 - 1.800	1.196	silver	10	359640 ^{1) 2)}

¹⁾ For rollers Rail groove 16/18/22 x 30 250 kg: application range - 30 mm. For rollers Rail groove 16/18/22 x 30 400 kg: application range + 535 mm.


²⁾ The specified ranges of application apply to the rollers groove 22 x 42.




359640 - punched connecting rod HS 16.4x4 L=1.196 FB 1.225-1.800 silver

Application range


200 kg

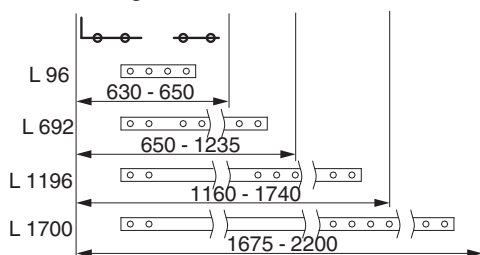

300 kg

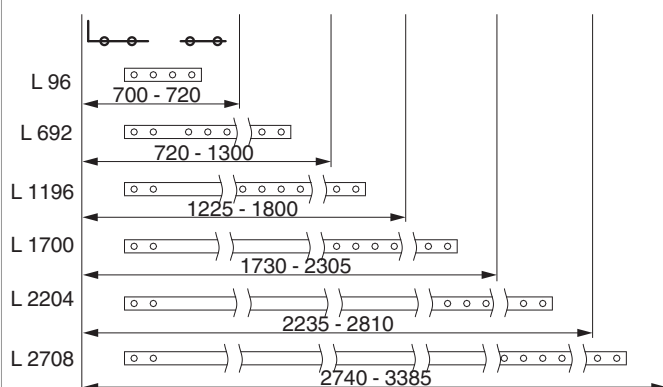


400 kg

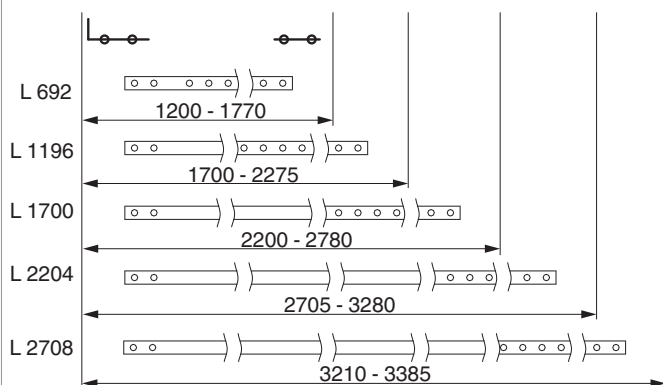



**359640 - punched connecting rod HS 16.4x4 L=1.196 FB
1.225-1.800 silver**

Installation

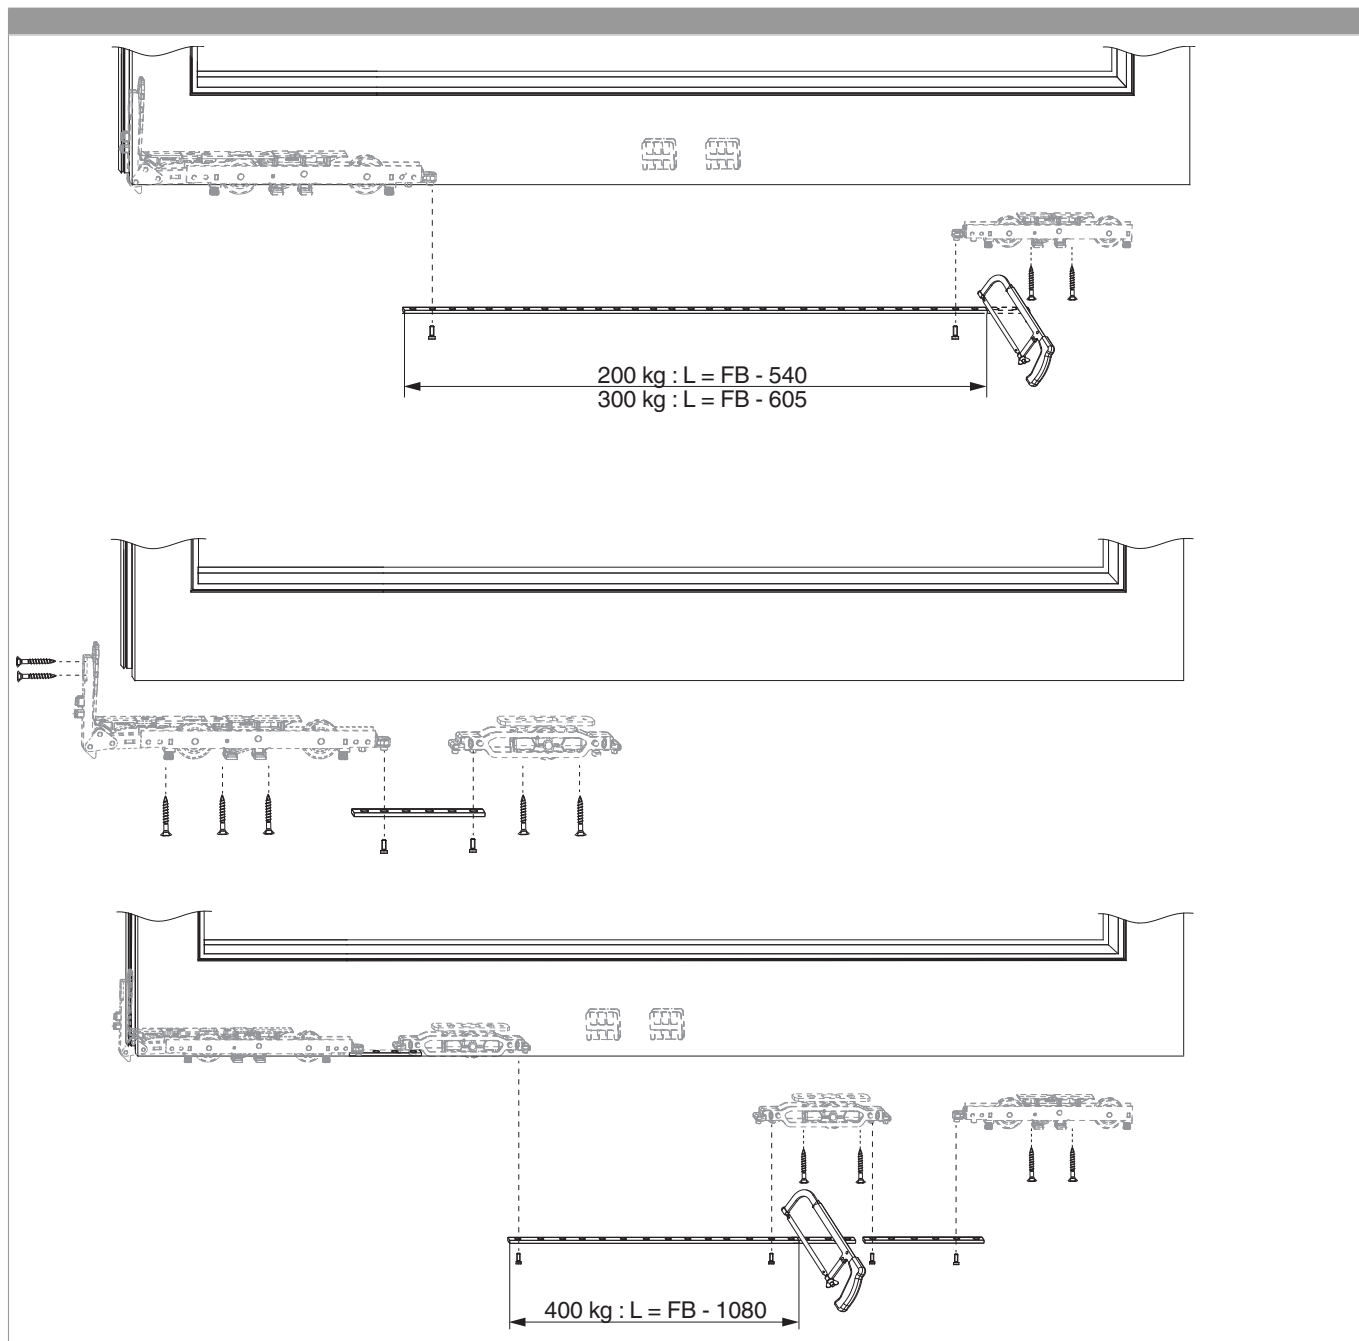



**359640 - punched connecting rod HS 16.4x4 L=1.196 FB
1.225-1.800 silver**