




359641 - punched connecting rod HS 16.4x4 L=1.700 FB 1.730-2.305 silver

Technical drawing



		L			Nº
connecting rod HS 16,4x4 punched	1.730 - 2.305	1.700	silver	10	359641 ^{1) 2)}

¹⁾ For rollers Rail groove 16/18/22 x 30 250 kg: application range - 30 mm. For rollers Rail groove 16/18/22 x 30 400 kg: application range + 535 mm.


²⁾ The specified ranges of application apply to the rollers groove 22 x 42.




359641 - punched connecting rod HS 16.4x4 L=1.700 FB 1.730-2.305 silver

Application range


200 kg

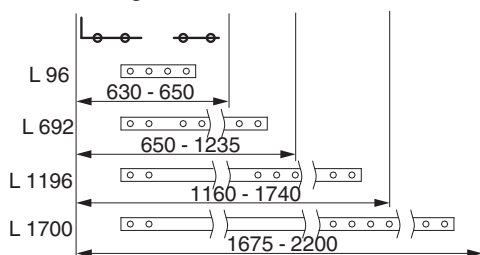

300 kg

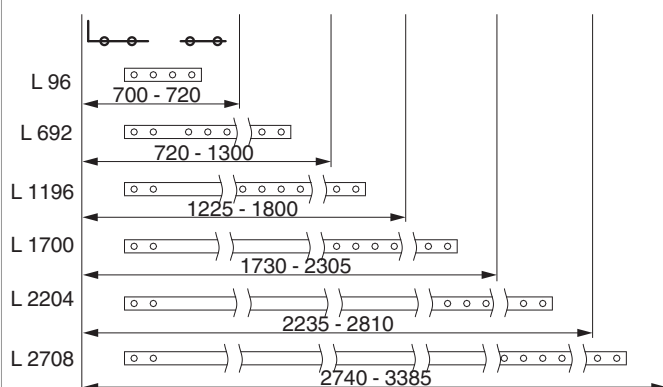


400 kg

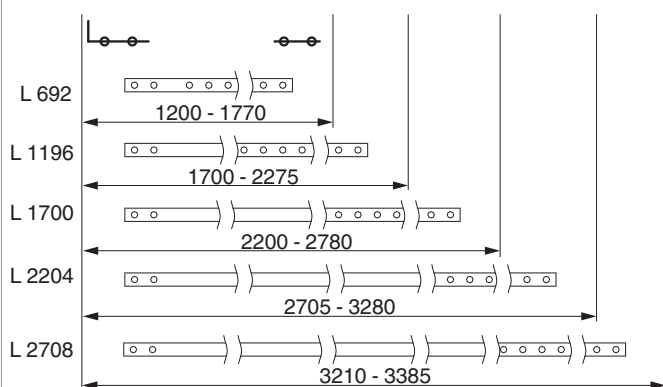



**359641 - punched connecting rod HS 16.4x4 L=1.700 FB
1.730-2.305 silver**

Installation

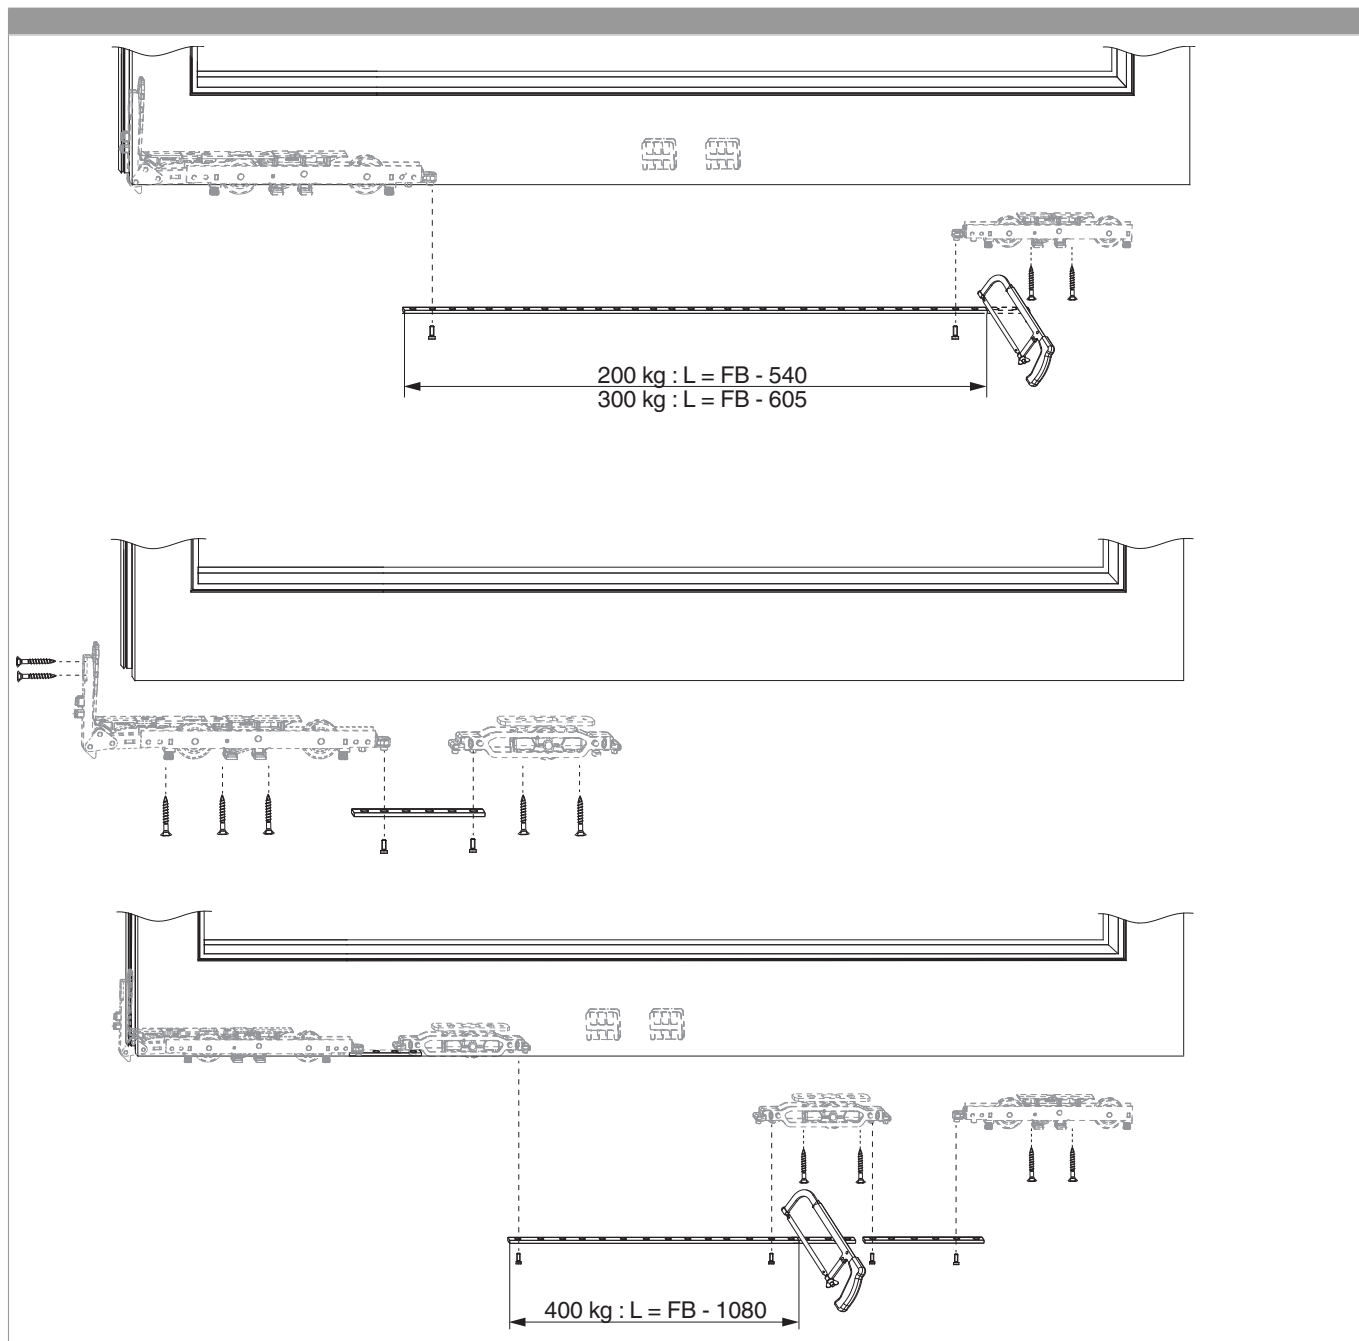



**359641 - punched connecting rod HS 16.4x4 L=1.700 FB
1.730-2.305 silver**