


359642 - punched connecting rod HS 16.4x4 L=2.204 FB 2.235-2.810 silver

Technical drawing



		L			No
connecting rod HS 16,4x4 punched	2.235 - 2.810	2.204	silver	10	359642 ^{1) 2)}

¹⁾ For rollers Rail groove 16/18/22 x 30 250 kg: application range - 30 mm. For rollers Rail groove 16/18/22 x 30 400 kg: application range + 535 mm.


²⁾ The specified ranges of application apply to the rollers groove 22 x 42.




359642 - punched connecting rod HS 16.4x4 L=2.204 FB 2.235-2.810 silver

Application range


200 kg

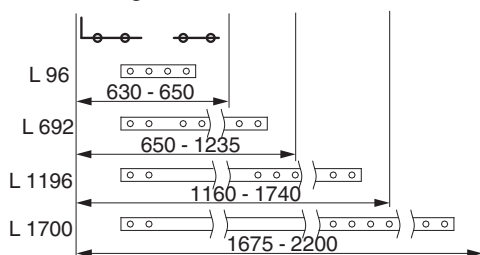

300 kg

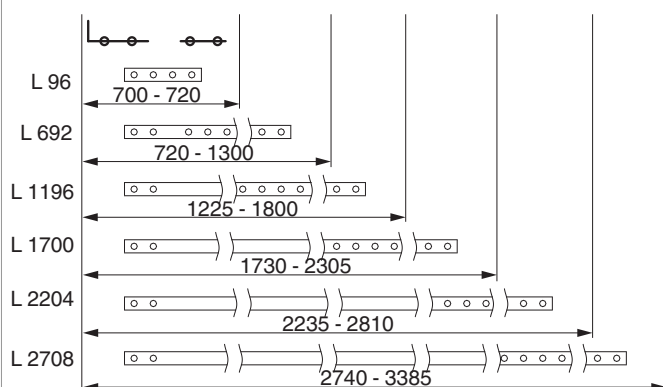


400 kg

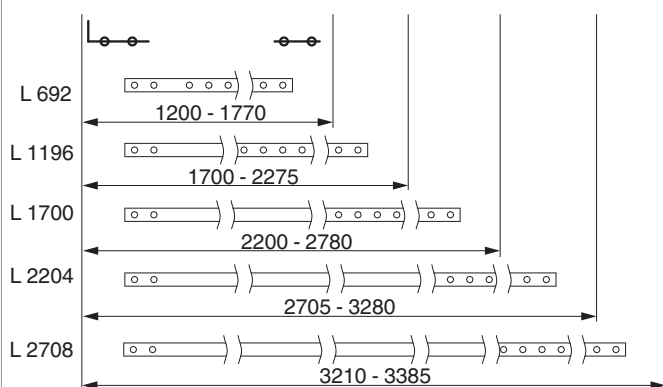



359642 - punched connecting rod HS 16.4x4 L=2.204 FB 2.235-2.810 silver

Installation

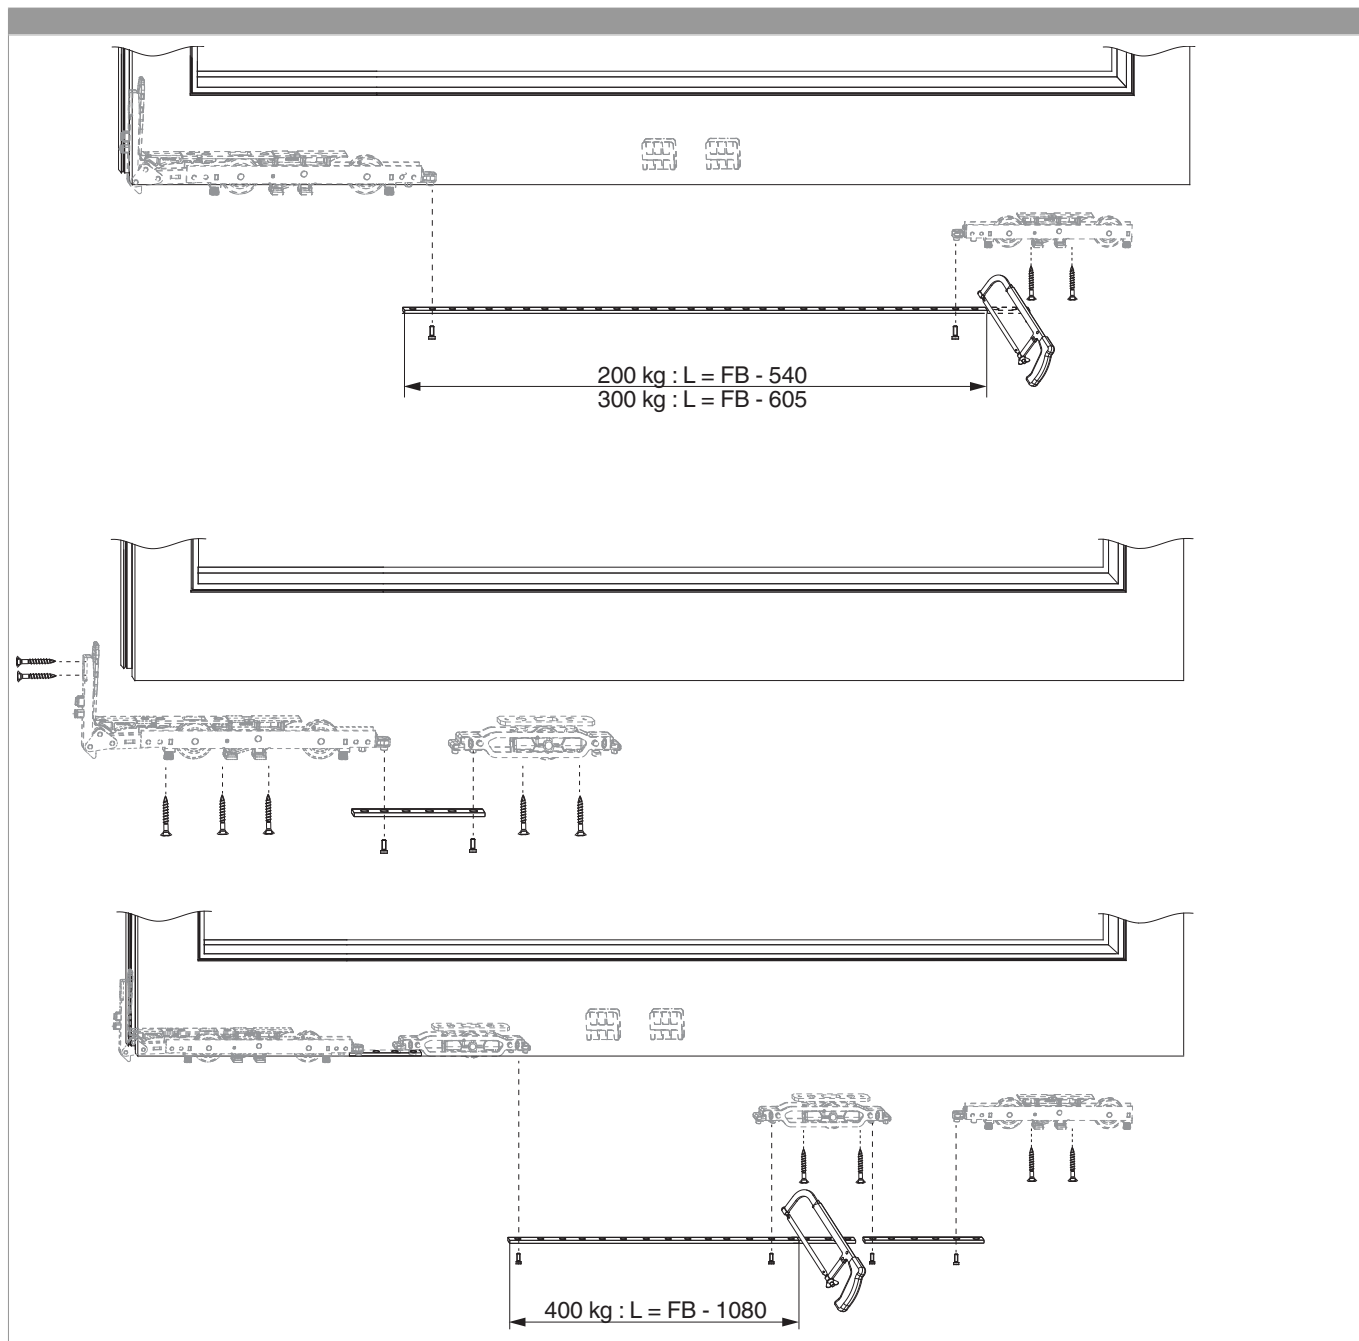



**359642 - punched connecting rod HS 16.4x4 L=2.204 FB
2.235-2.810 silver**