




359643 - punched connecting rod HS 16.4x4 L=2.708 FB 2.740-3.385 silver

Technical drawing



		L			No
connecting rod HS 16,4x4 punched	2.740 - 3.385	2.708	silver	10	359643 ^{1) 2)}

¹⁾ For rollers Rail groove 16/18/22 x 30 250 kg: application range - 30 mm. For rollers Rail groove 16/18/22 x 30 400 kg: application range + 535 mm.


²⁾ The specified ranges of application apply to the rollers groove 22 x 42.




359643 - punched connecting rod HS 16.4x4 L=2.708 FB 2.740-3.385 silver

Application range


200 kg

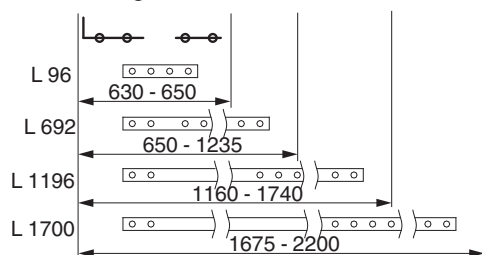

300 kg

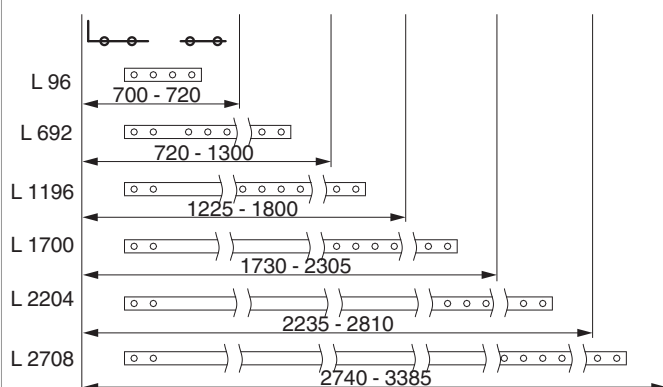


400 kg

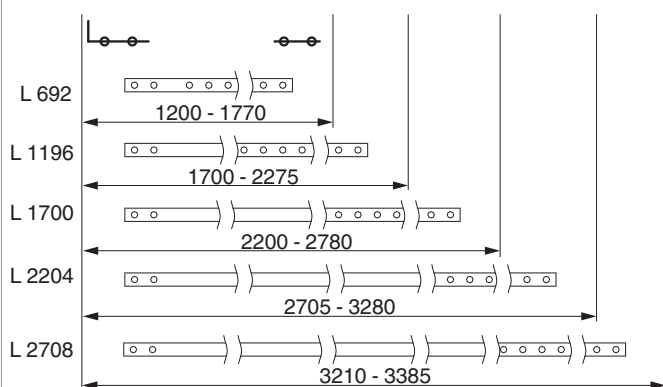



**359643 - punched connecting rod HS 16.4x4 L=2.708 FB
2.740-3.385 silver**

Installation

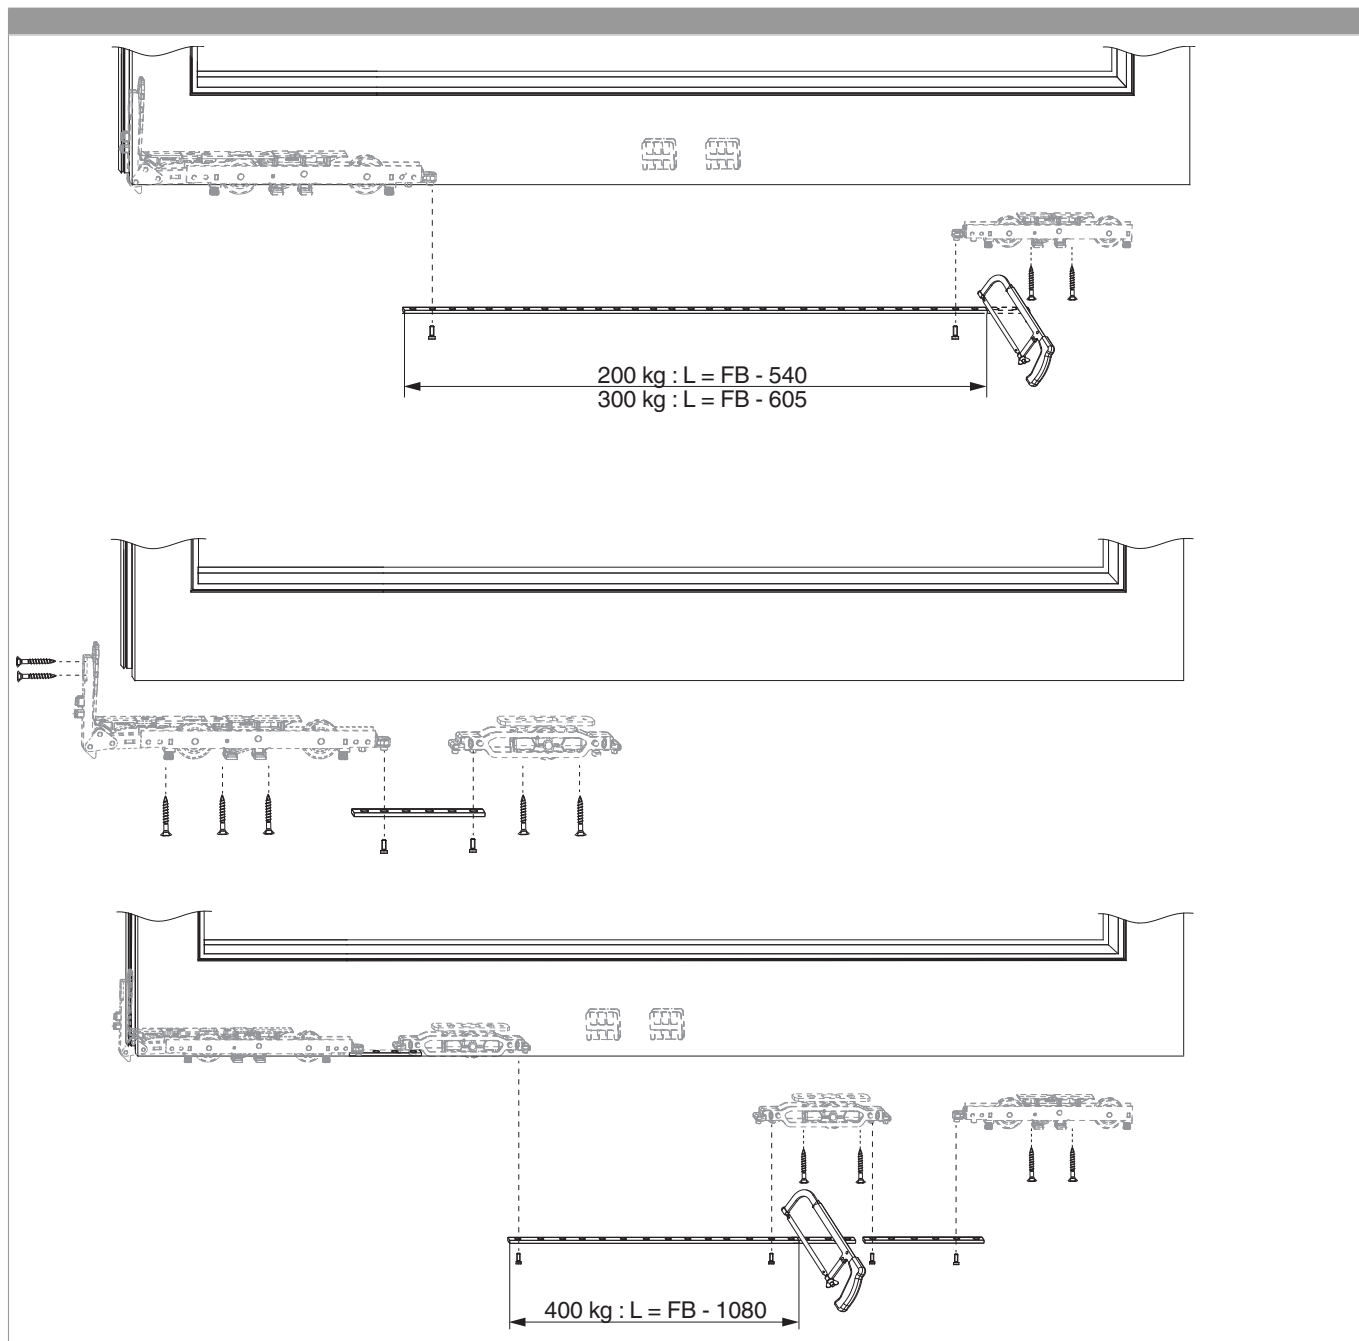



**359643 - punched connecting rod HS 16.4x4 L=2.708 FB
2.740-3.385 silver**