


361173 - fully punched connecting rod HS 16.4x4 L=3.240 FB 720-3.385 silver

Technical drawing



		L			Nº
connecting rod HS 16,4x4 fully punched	720 - 3.385	3.240	silver	10	361173 ^{1) 2)}

¹⁾ For rollers Rail groove 16/18/22 x 30 250 kg: application range - 30 mm. For rollers Rail groove 16/18/22 x 30 400 kg: application range + 535 mm.


²⁾ The specified ranges of application apply to the rollers groove 22 x 42.




361173 - fully punched connecting rod HS 16.4x4 L=3.240
FB 720-3.385 silver

Application range


200 kg

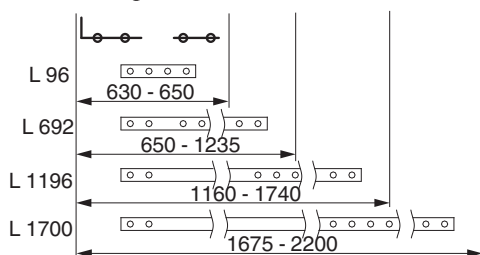

300 kg

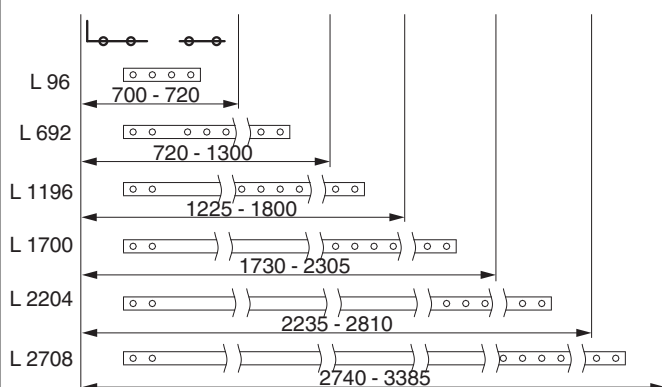


400 kg

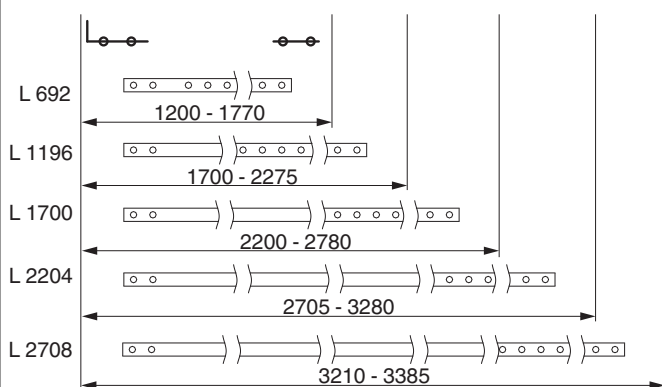



361173 - fully punched connecting rod HS 16.4x4 L=3.240 FB 720-3.385 silver

Installation

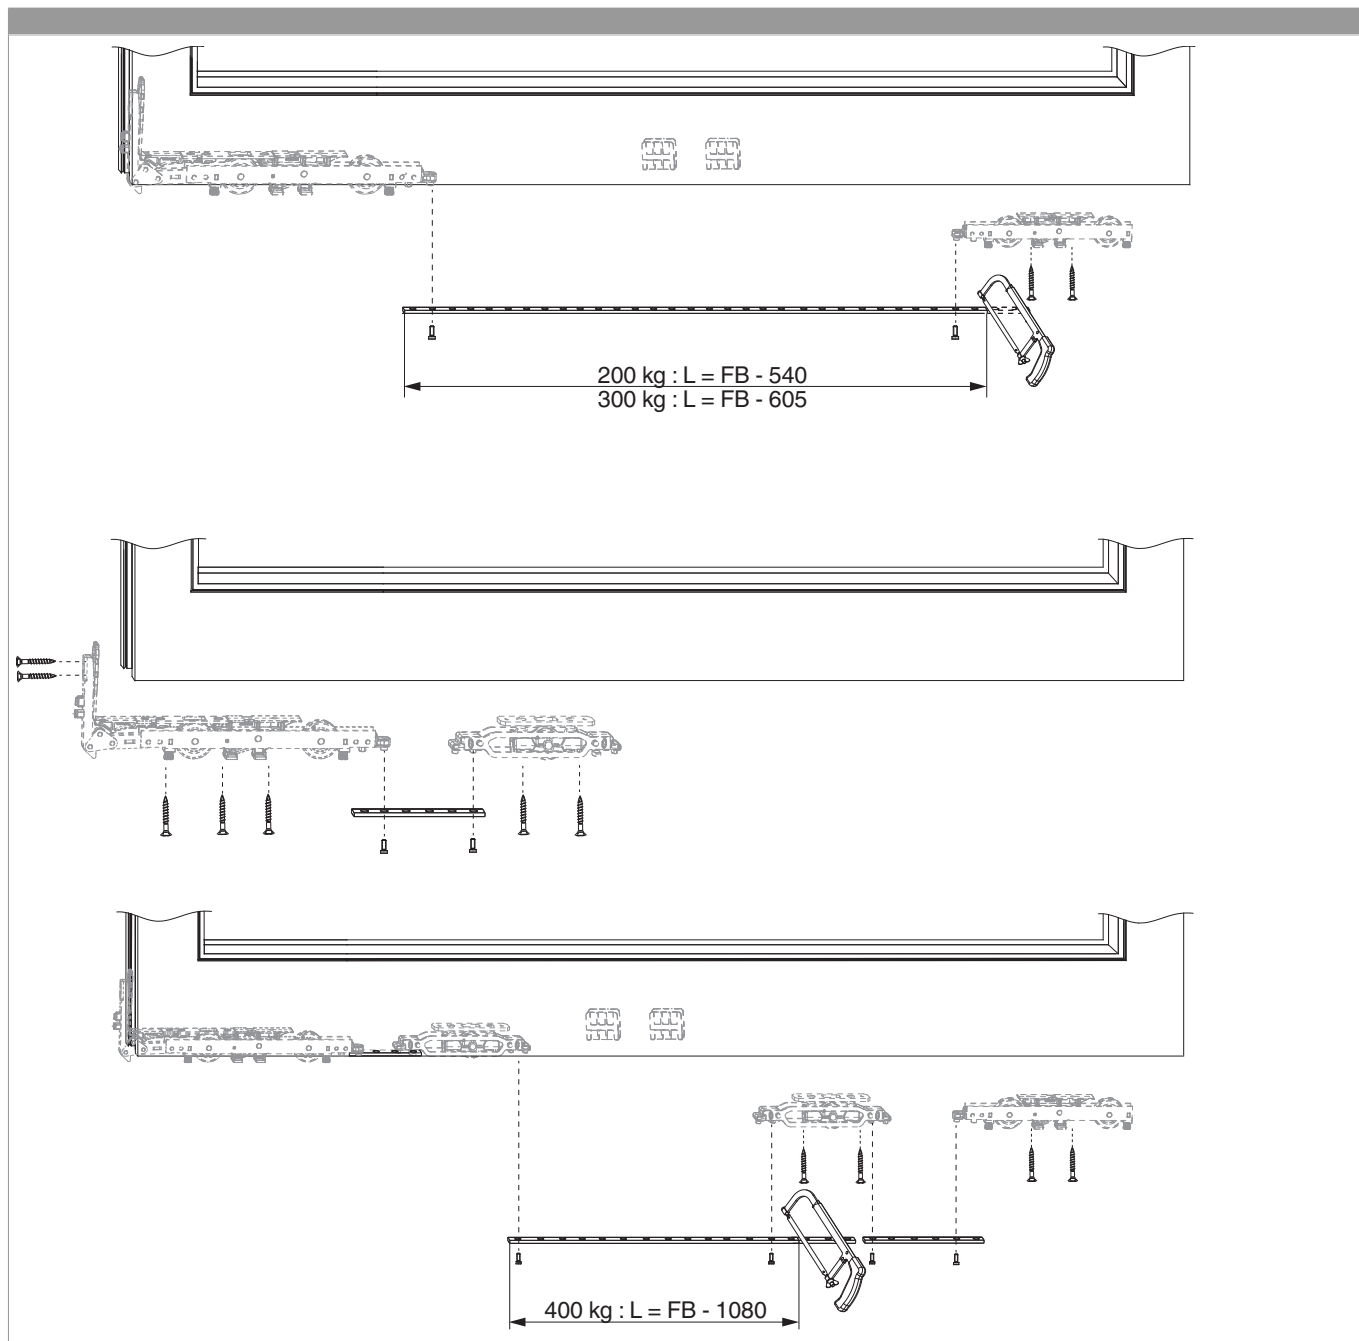



361173 - fully punched connecting rod HS 16.4x4 L=3.240
FB 720-3.385 silver